



UNITED STATES DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
NATIONAL MARINE FISHERIES SERVICE
NORTHEAST REGION
One Blackburn Drive
Gloucester, MA 01930-2298

March 15, 2007

Dear Commercial Lobster Trap/Pot and Gillnet Fishermen:

This letter is to inform you that NOAA's National Marine Fisheries Service (NMFS) has established a Dynamic Area Management (DAM) zone with required gear modifications for lobster trap/pot and anchored gillnet fishing gear. The required gear modifications for lobster trap/pot and anchored gillnet gear will be effective for 15 days, in an area southeast of Boston, MA, totaling approximately 1,631 square nautical miles (nm^2) in March and approximately 832 square nautical miles (nm^2) in April. In addition, NMFS requires that no additional gear be set in the DAM zone during the restricted period unless that gear has been modified accordingly. This action is being taken to respond to reported aggregations of endangered Northern right whales (right whales). The regulations implementing the Atlantic Large Whale Take Reduction Plan (ALWTRP) provide NMFS the authority to temporarily restrict the use of lobster trap/pot and anchored gillnet fishing gear on an expedited basis to protect right whales through its DAM program.

A DAM zone is triggered by a single reliable report from a qualified individual of three or more right whales within an area (75 nm^2) such that right whale density is equal to or greater than 0.04 right whales per nm^2 . On March 9, 2007, NMFS received two sightings reports, totaling 10 right whales in two areas: the first location is 75 nm southeast of Boston, MA, in the proximity of $41^\circ 37'$ N latitude and $69^\circ 32'$ W longitude (7 whales), and the second is 85 nm southeast of Boston, MA, in the proximity of $41^\circ 31'$ N latitude and $69^\circ 21'$ W longitude (3 whales). NMFS determined that these sightings were reliable reports submitted by qualified individuals that meet the DAM zone trigger.

Therefore, NMFS is announcing required gear modifications for the DAM zone. **Effective 0001 hours March 22, 2007, through 2400 hours April 5, 2007**, anchored gillnet and lobster trap/pot gear in the DAM zone must comply with the required gear modifications. The required gear modifications and the coordinates for the DAM zone are found in the enclosure to this letter. **Special note for gillnet and lobster trap/pot fisherman: This DAM action does not supersede the Great South Channel Restricted Area regulations in April found under the ALWTRP at 50 CFR 229.32. Gillnet fishermen fishing in the Sliver Area during the time specified in this letter must comply with the DAM gillnet gear modifications specified in this letter. Special note for gillnet fisherman: a portion of this DAM zone overlaps the year-round Northeast Multispecies Closed Area I found at 50 CFR 648.81(f)(a). Due to this closure, sink gillnet gear is prohibited from this portion of the DAM zone.**

To obtain the DAM regulations in their entirety, please call 978-281-9300 x6503. In addition, these regulations are available by accessing the ALWTRP web page (<http://www.nero.nmfs.gov/whaletrp/>). If you have any questions regarding these regulations, please call 978-281-9300 x6503.


Sincerely,

Patricia A. Kurkul
Regional Administrator

Enclosure




March DAM Zone from March 9, 2007
Sighting of 10 Northern right whales southeast of Boston, MA

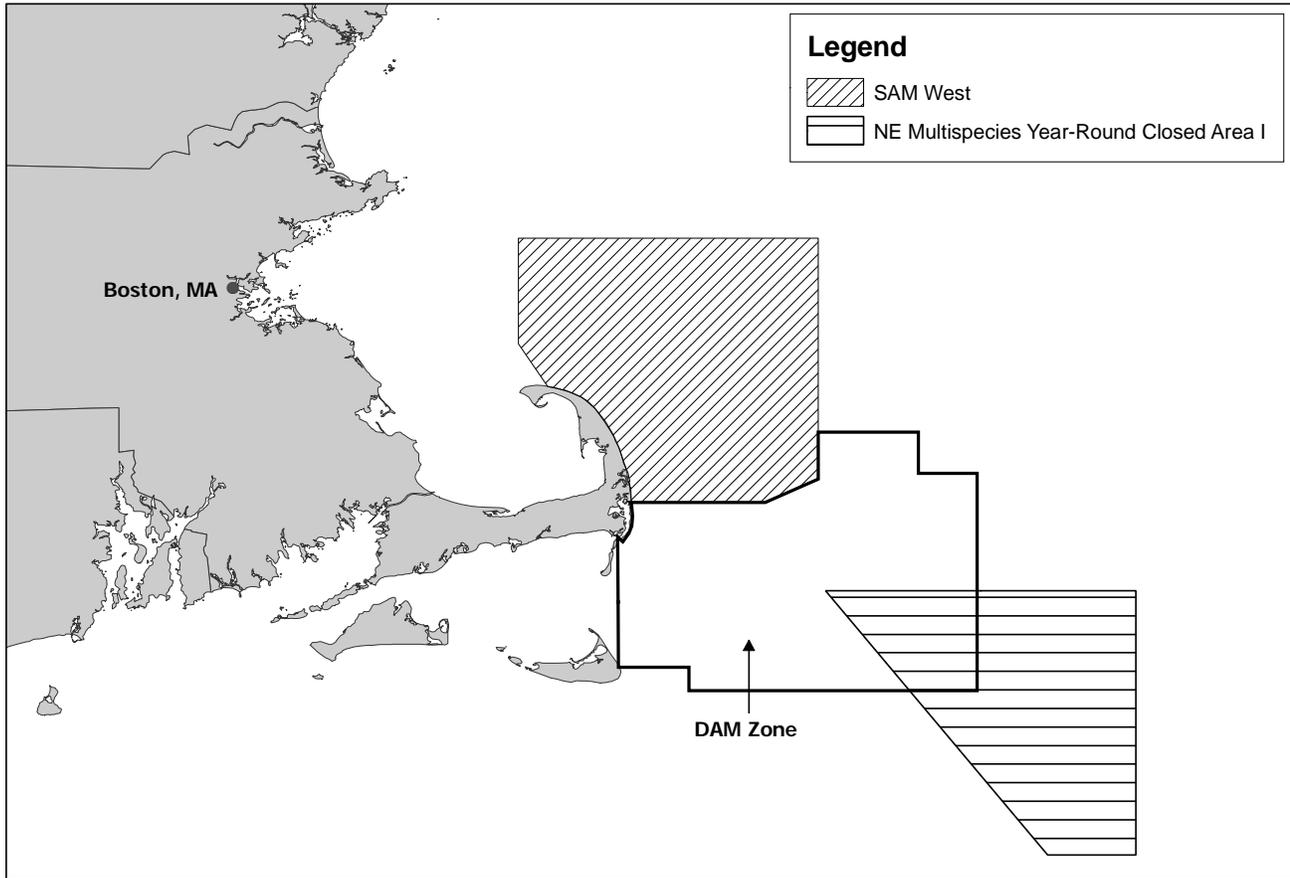

Coordinates for the March DAM Zone, effective from 0001 hours March 22, 2007, through 2400 hours March 31, 2007, are as follows:

- 41° 57' N., 69° 24' W (NW Corner)
- 41° 57' N., 69° 07' W
- 41° 50' N., 69° 07' W
- 41° 50' N., 68° 57' W
- 41° 13' N., 68° 57' W
- 41° 13' N., 69° 46' W
- 41° 17' N., 69° 46' W
- 41° 17' N., 69° 58' W
- 41° 40' N., 69° 58' W, and follow the coastline north to
- 41° 45' N., 69° 56' W
- 41° 45' N., 69° 33' W
- 41° 49' N., 69° 24' W
- 41° 57' N., 69° 24' W (NW Corner)

**April DAM Zone from March 9, 2007
Sighting of 10 Northern right whales southeast of Boston, MA**

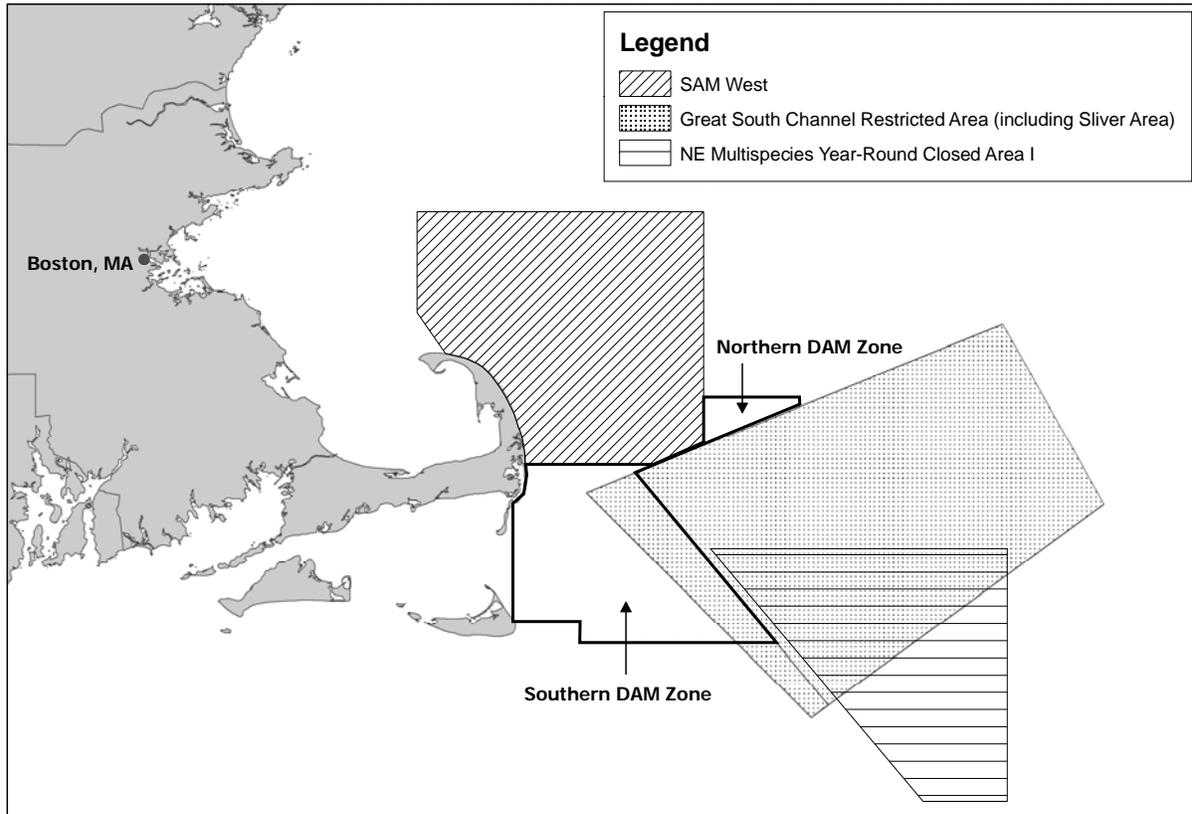

Coordinates for the April DAM Zone, effective from 0001 hours April 1, 2007, through 2400 hours April 5, 2007, are as follows:

Northern DAM:

- 41° 57' N., 69° 24' W (NW Corner)
- 41° 57' N., 69° 07' W
- 41° 55' N., 69° 07' W
- 41° 49' N., 69° 24' W
- 41° 57' N., 69° 24' W (NW Corner)

Southern DAM:

- 41° 45' N., 69° 56' W (NW Corner)
- 41° 45' N., 69° 33' W
- 41° 44' N., 69° 36' W
- 41° 13' N., 69° 10' W
- 41° 13' N., 69° 46' W
- 41° 17' N., 69° 46' W
- 41° 17' N., 69° 58' W
- 41° 40' N., 69° 58' W, and follow the coastline north to
- 41° 45' N., 69° 56' W (NW Corner)

DAM Program Gear Requirements

In addition to those gear modifications currently implemented under the ALWTRP at 50 CFR 229.32, the following gear modifications are required in the DAM zone. If the requirements and exceptions for gear modification in the DAM zone, as described below, differ from other ALWTRP requirements for any overlapping areas and times, then the more restrictive requirements will apply in the DAM zone. Please note that the below provides a summary of the DAM Program gear requirements and is not a substitute for the ALWTRP regulations.

Lobster Trap/Pot Gear

Fishermen utilizing lobster trap/pot gear within the portion of the Northern Inshore State Lobster Waters, and Northern Nearshore Lobster Waters, that overlap with the DAM zone are required to utilize all of the following gear modifications while the DAM zone is in effect:

1. Groundlines must be made of either sinking or neutrally buoyant line. Floating groundlines are prohibited;
2. All buoy lines must be made of either sinking or neutrally buoyant line, except the bottom portion of the line, which may be a section of floating line not to exceed one-third the overall length of the buoy line;
3. Fishermen are allowed to use two buoy lines per trawl; and
4. A weak link with a maximum breaking strength of 600 lb (272.4 kg) must be placed at all buoys.

Fishermen utilizing lobster trap/pot gear within the portion of the Offshore Lobster Waters Area and Great South Channel Restricted Lobster Area that overlap with the DAM zone are required to utilize all of the following gear modifications while the DAM zone is in effect:

1. Groundlines must be made of either sinking or neutrally buoyant line. Floating groundlines are prohibited;
2. All buoy lines must be made of either sinking or neutrally buoyant line, except the bottom portion of the line, which may be a section of floating line not to exceed one-third the overall length of the buoy line;
3. Fishermen are allowed to use two buoy lines per trawl; and
4. A weak link with a maximum breaking strength of 1,500 lb (680.4 kg) must be placed at all buoys.

Anchored Gillnet Gear

Fishermen utilizing anchored gillnet gear within the portions of the Other Northeast Gillnet Waters Area, Great South Channel Restricted Gillnet Area, and Great South Channel Sliver Restricted Area that overlap with the DAM zone are required to utilize all the following gear modifications while the DAM zone is in effect:

1. Groundlines must be made of either sinking or neutrally buoyant line. Floating groundlines are prohibited;
2. All buoy lines must be made of either sinking or neutrally buoyant line, except the bottom portion of the line, which may be a section of floating line not to exceed one-third the overall length of the buoy line;
3. Fishermen are allowed to use two buoy lines per string;
4. Each net panel must have a total of five weak links with a maximum breaking strength of 1,100 lb (498.8 kg). Net panels are typically 50 fathoms (91.4 m) in length, but the weak link requirements would apply to all variations in panel size. These weak links must include three floatline weak links. The placement of the weak links on the floatline must be: one at the center of the net panel and one each as close as possible to each of the bridle ends of the net panel. The remaining two weak links must be placed in the center of each of the up and down lines at the panel ends;
5. A weak link with a maximum breaking strength of 1,100 lb (498.8 kg) must be placed at all buoys; and
6. All anchored gillnets, regardless of the number of net panels, must be securely anchored with the holding power of at least a 22 lb (10.0 kg) Danforth-style anchor at each end of the net string.